

LCD MODULE
SPECIFICATION

Model:	UE052HD-RN40-L003
Version:	V1.0
Date:	20171124

☒ Preliminary Specification 样品规格书

☐ Final Specification 量产规格书

Customer Confirmation 客户确认

Approved by	Notes

Please return one of the copies of the specification with your signature to us within two weeks after you receive this document. If it is not returned, we will assume that you agree to the entire contents of this specification document.

请贵司在收到规格书的两周内, 将签好字的规格书原件或者复印件寄回. 如果没有返回, 我司将会认为贵司已经默认接受产品规格书中的全部资料和规范.

VIEWE Confirmation 优奕确认

Prepared by	Reviewed by	Approved by

REVISION HISTORY

Revision 版本号	Date 日期	Contents of Revision Change 修改内容	Remark 备注
V1.0	2017.11.24	Preliminary release	

TABLE of CONTENTS

1. GENERAL INFORMATION	4
1.1 Features	4
1.2 Mechanical Specification	4
2. ABSOLUTE MAXIMUM RATINGS	5
3. MECHANICAL DRAWING	6
4. I/O CONNECTION & BLOCK DIAGRAM	7
4.1 I/O Connection	7
4.2 Block Diagram	8
5. ELECTRICAL CHARACTERISTICS	9
5.1 TFT-LCD Panel Driving Section	9
5.2 Back Light Driving Section	9
5.3 Power On/Off Sequence	10
5.4 Timing Characteristics	11
5.5 Timing Diagram	11
6. OPTICAL CHARACTERISTICS	12
7. RELIABILITY	15
8. PACKAGE DRAWING	16

1. GENERAL INFORMATION

1.1 Features

- 1) Pixel Arrangement: RGB Vertical Stripe
- 2) Interface Mode: MIPI
- 3) Driver IC: HX8394F
- 4) Operation Temperature: -20~70°C
- 5) Storage Temperature: -30~80°C
- 6) Backlight Type: White LED
- 7) Display mode: Normally Black, Transmissive
- 8) Pixel Density: 282 PPI
- 9) LED life time: 30,000 Hours

1.2 Mechanical Specification

Item 项目	Specification 规格	Unit 单位	Remark 备注
Pixel Driving element	A-Si TFT	-	
Screen Size	5.2	Inch	Diagonal
Resolution	720(W)*3(RGB)*1280(H)	Dots	
Interface	MIPI	-	4lane
Module Power Consumption	1.00	Watt	Typ.
Active Area	64.8(W)*115.2(H)	mm	
Pixel pitch (W*H)	0.09(W)*0.09(H)	mm	
Module Size (W*H*D)	67.1(W)*122.2(H)*1.54(D)	mm	Tolerance: ±0.15
Luminance	450	cd/m ²	Typ.
Viewing Direction	All	O'clock	-
Display Color	16.7M	Colors	24bits

2. ABSOLUTE MAXIMUM RATINGS

Item 项目	Symbol 符号	Min. 最小值	Max. 最大值	Unit 单位	Remark 备注
Power supply1 voltage	VCC2.8V	-0.3	6.6	V	Note1
Power supply2 voltage	IOVCC1.8V	-0.3	3.6	V	Note1
LED forward current	I _F	-0.001	40	mA	For each led,Note1
LED Reverse Voltage	V _R	-	5	V	For each led,Note1
Operating temperature	T _{op}	-20	70	°C	Note1,2
Storage temperature	T _{st}	-30	80	°C	Note1,2
Humidity	H _{st}	10	90	%RH	Note1,3

(Ta=+25°C,GND=0V)

Note1:If the module exceeds the absolute maximum ratings, it may be damaged permanently. Also if the module operates with the absolute maximum ratings for a long time, the reliability may drop.

Note2: In case of temperature below 0°C,the response time of liquid crystal (LC) becomes slower and the color of panel darker than normal one.

Note3: Temp. ≤ 60°C , 90% RH MAX.

Temp. > 60°C , Absolute humidity shall be less than 90% RH .

3. MECHANICAL DRAWING

[illegible]


4. I/O CONNECTION & BLOCK DIAGRAM

4.1 I/O Connection

Pin NO. 序号	Symbol 符号	I/O	Description 描述
1-7	NC	-	Dummy
8	TE	O	Synchronizing RAM data write operations
9	GND	P	Power Ground
10	MIPI_TD3P	I	Differential data signals
11	MIPI_TD3N	I	Differential data signals
12	GND	P	Power Ground
13	MIPI_TD0P	I	Differential data signals
14	MIPI_TD0N	I	Differential data signals
15	GND	P	Power Ground
16	MIPI_TCP	I	Differential clock signals
17	MIPI_TCN	I	Differential clock signals
18	GND	P	Power Ground
19	MIPI_TD1P	I	Differential data signals
20	MIPI_TD1N	I	Differential data signals
21	MIPI_TD2P	I	Differential data signals
22	MIPI_TD2N	I	Differential data signals
23	GND	P	Power Ground
24	RST	I	Global reset for LCM, active is low
25	IOVDD	P	Power supply for digital circuits and IO pads(1.8V)
26	NC	-	Dummy
27	VDD	P	Power supply for digital circuits (2.8V)
28	CTP_EINT	O	Interrupt signals for TP
29	CTP_RST	I	The signal will reset the TP, Signal is active low.
30	CTP_SCL	I	I2C clock signals for TP
31	CTP_SDA	I/O	I2C data signals for TP
32	CTP_VDD	P	Analog Power Supply for TP
33	NC	-	Dummy
34	LCD_ID	I	Hardware ID selection, default output 1.2V
35	NC	-	Dummy
36	LED_K	P	Power for Backlight Cathode
37	LED_K	P	Power for Backlight Cathode
38	NC	-	Dummy
39	LED_A	P	Power for Backlight Anode
40	LED_A	P	Power for Backlight Anode

I: Input; O: Output; P: Power

4.2 Block Diagram

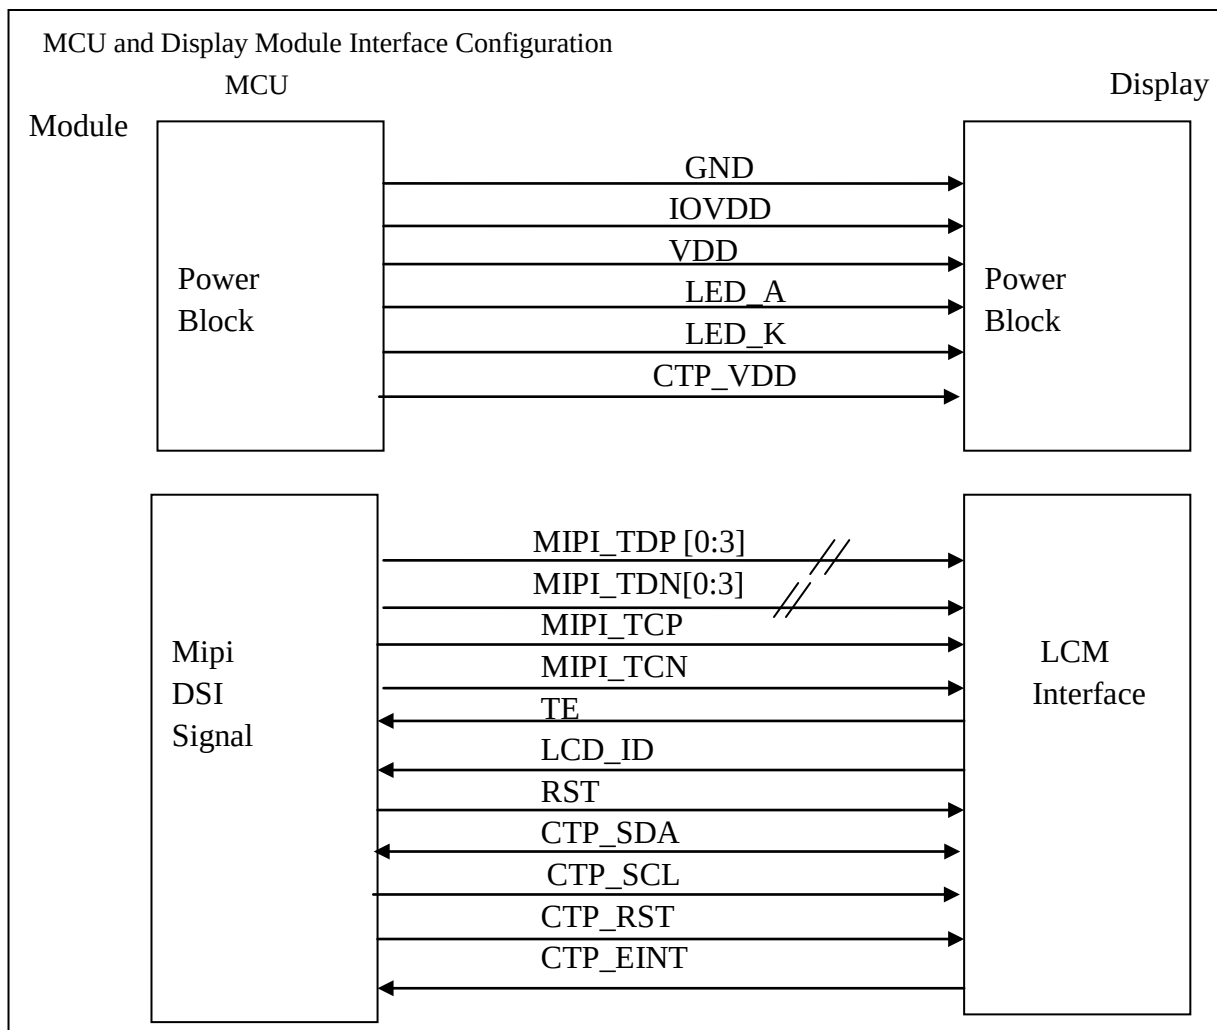

5. ELECTRICAL CHARACTERISTICS

5.1 TFT-LCD Panel Driving Section

Item 项目	Symbol 符号	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Power Supply1 Voltage	IOVDD	1.7	1.8	3.6	V	-
Power Supply2 Voltage	VDD	2.7	2.8	3.6	V	-
Power Supply Current	I _{VDD}	-	40	-	mA	Note1
Logic Input High Voltage	V _{IH}	0.7IOVDD	-	IOVDD	V	-
Logic Input Low Voltage	V _{IL}	0	-	0.3IOVDD	V	-
Panel Power Consumption	P _{VDD}	-	0.112	-	Watt	Note1
Module Power Consumption	P _{LCM}	-	1.00	-	Watt	Note1,2

(Ta=+25°C,GND=0V)

Note1:Measurement Conditions (Video Mode): Full Screen Red Pattern,VDD=2.8V,60Hz Refresh.

Note2: P_{LCM}= P_{VDD}+ P_{BL}, About P_{BL} information, inference to 5.2 Back Light Driving Section.

5.2 Back Light Driving Section


Item 项目	Symbol 符号	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Forward Voltage	V _F	-	22.4	-	V	Note1
Forward Current	I _F	-	40	-	mA	Note1
Backlight Power consumption	P _{BL}	-	0.896	-	Watt	Note1
LED life time	-	30000	-	-	Hours	Note2
LED Quantity		14			PCS	

(Ta=+25°C,GND=0V)

Note1: The LED driving condition is defined for each LED module (7 LED Serial, 2 LED Parallel).

For each LED : I_F=20mA,V_F=3.2V(Typ.),Ta=25°C。

Note2:The “LED life time” is defined as the module brightness decrease to 50% of original brightness at I_{LED}=20mA(Per Led). The LED life time could be decreased if operating I_{LED} is larger than 20mA.



BACKLIGHT CIRCUIT DIAGRAM 20mA/LED (14LED)

LED V_f: 22.4V (TYP)

背光电路图

(CIRCUIT DIAGRAM)

5.3 Power On/Off Sequence


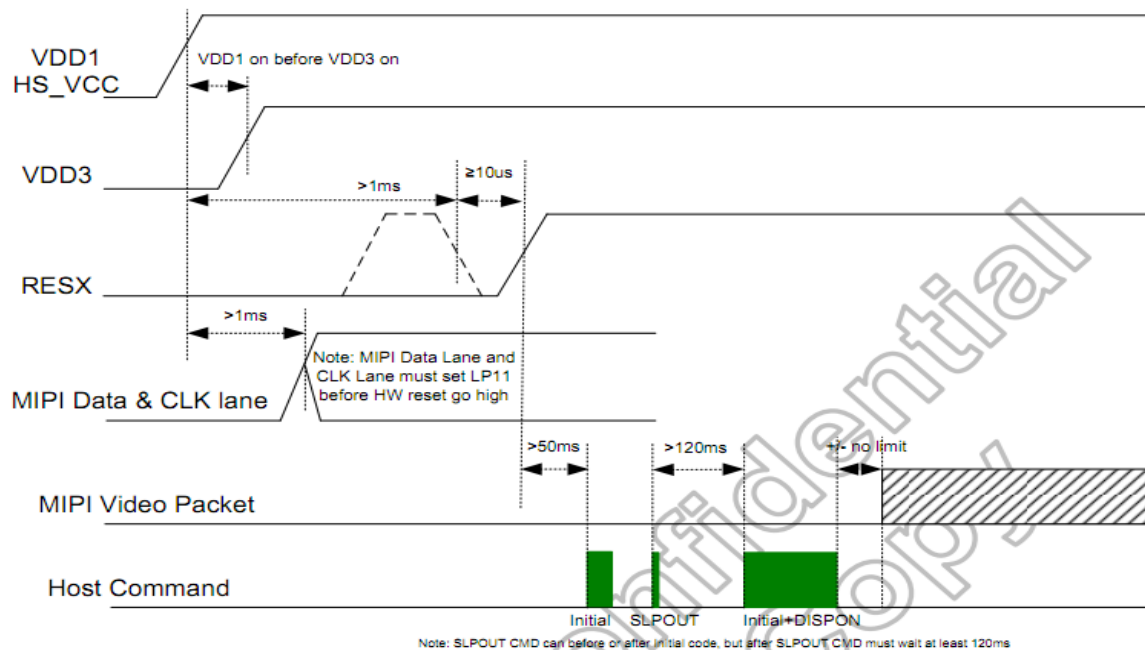


Figure : IOVCC(1.8V)/VCC(2.8V) input power on sequence

5.4 Timing Characteristics

($T_a = +25^\circ\text{C}$, GND=0V)

Parameter	Symbol	Min	Typ	Max	Units
UI instantaneous	U_{INST}	2	-	12.5	ns
Data to Clock Skew(measured at transmitter)	$T_{SKEW(TX)}$	-0.15	-	0.15	U_{INST}
Data to Clock Setup time(measured at receiver)	$T_{SETUP(RX)}$	0.15	-	-	U_{INST}
Data to Clock Hold time(measured at receiver)	$T_{HOLD(RX)}$	0.15	-	-	U_{INST}
20%~80% rise time and fall time	T_R, T_F	150	-	-	ps
		-	-	0.3	U_{INST}

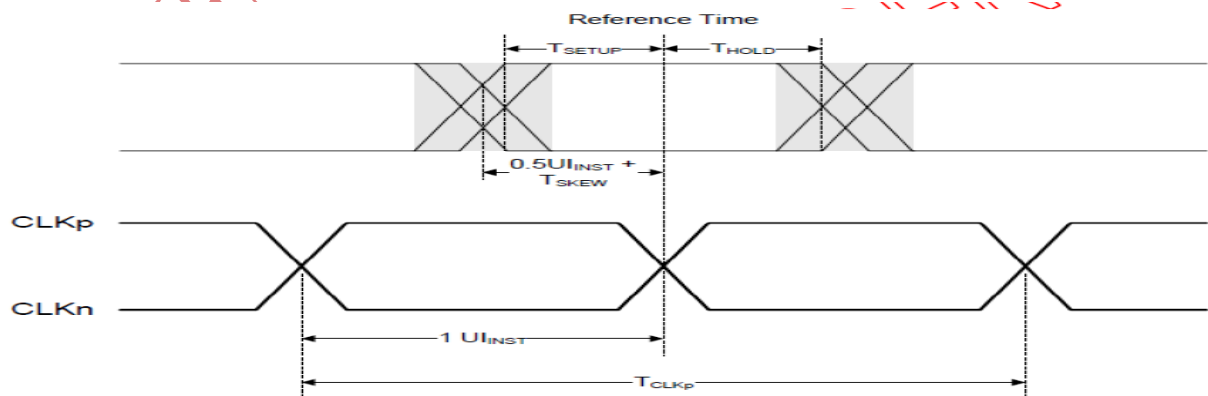


6. OPTICAL CHARACTERISTICS

Parameter 参数	Symbol 符号	Condition 条件	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Contrast Ratio	C/R	$\theta = 0^\circ$	800	1000	-	-	Note(4)
NTSC Ratio	S	$\theta = 0^\circ$	61.6	66.6	-	%	Note(7)
Luminance	L	$\theta = 0^\circ$	-	450	-	cd/m ²	Note(5)
Luminance uniformity	U _w	$\theta = 0^\circ$	80	-	-	%	Note(3)
Response Time	T _R + T _F	25 °C	-	25	35	ms	Note(2)
Color Coordination	W _X	$\theta = 0^\circ$ (Center) Normal viewing angle B/L On	-0.03	0.284	+0.03	NTSC (x,y)	Note(6)
	W _Y			0.307			
	R _X			0.657			
	R _Y			0.319			
	G _X			0.262			
	G _Y			0.556			
	B _X			0.138			
	B _Y			0.097			
Viewing Angle	θ_L	C/R>10	-	80	-	Degree	Note(1)
	θ_R		-	80	-		
	θ_U		-	80	-		
	θ_D		-	80	-		


Test Conditions:

- VDD=2.8V, I_F=40mA (Backlight current), the ambient temperature is +25°C.

Note1: Definition of Viewing Angle: The viewing angle range that the CR>10

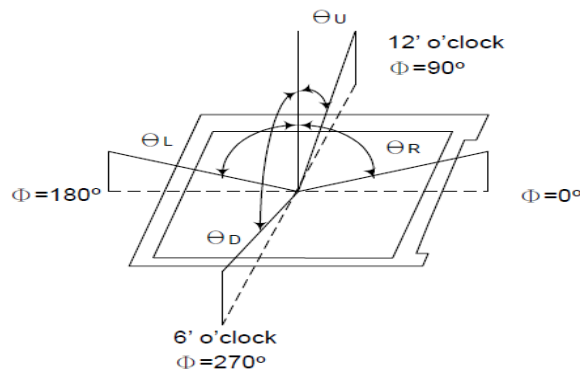


Note2: Definition of Response time: Sum of T_R and T_F

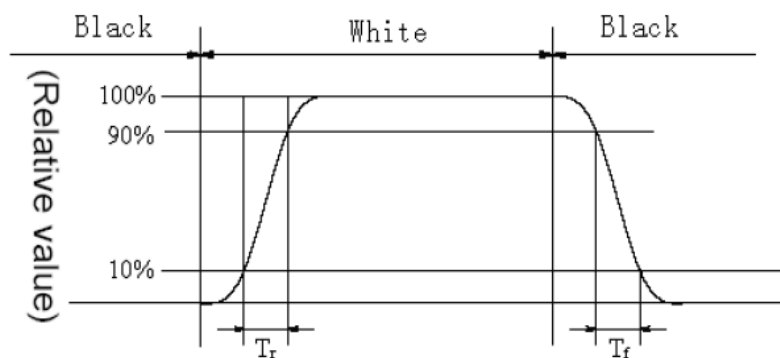

Note 3: Definition of Luminance Uniformity: Active area is divided into 9 measuring areas, every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity} = \frac{\text{Min Luminance of white among 9-points}}{\text{Max Luminance of white among 9-points}} \times 100\%$$

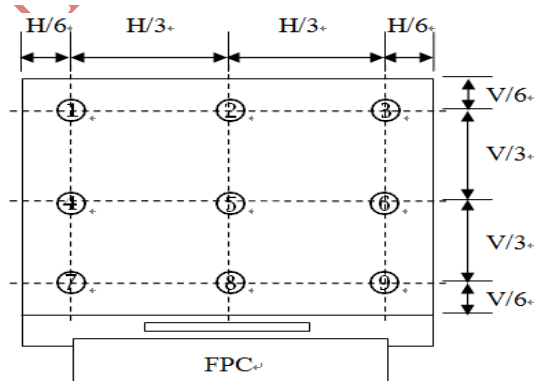

Note4: Definition of Contrast Ratio (CR): measured at the center point of panel

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$


Note 5: Definition of Luminance: Center Luminance of white is defined as luminance values of 1point average across the LCD surface.

Note 6: Definition of Color Chromaticity (CIE 1931)

Color coordinates of white & red, green, blue measured at center point of LCD.


Note 7: Definition of NTSC ratio:

$$\text{NTSC ratio} = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}}$$

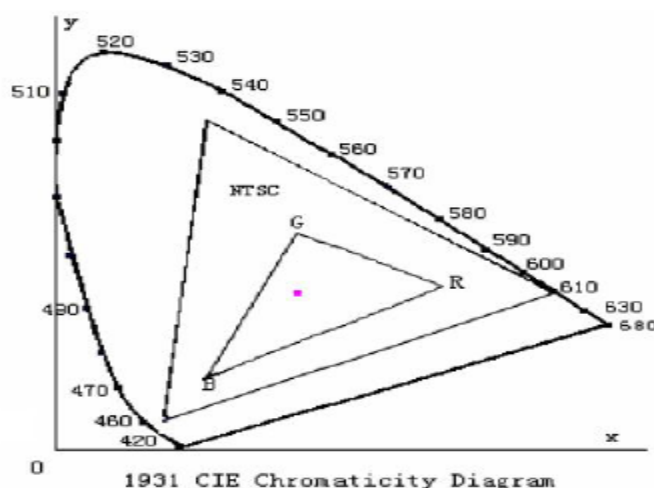

Note 8: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen.(Response time is measured by Photo detector TOPCON BM-7, Field of view: 1°/Height: 500mm.)

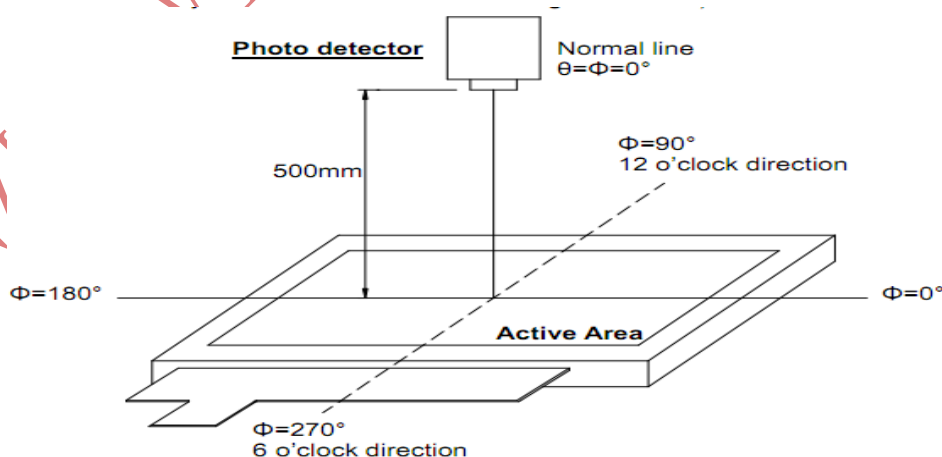

7. RELIABILITY

Item 项目	Test Condition 测试条件	Remark 备注
High Temperature Storage	Ta =+80°C / 240Hours	Note1,2,3
Low Temperature Storage	Ta =-30°C / 240Hours	Note1,2,3
High Temperature Operating	Ta =+70°C / 240Hours	Note1,2,3
Low Temperature Operating	Ta =-20°C / 240Hours	Note1,2,3
Temperature Cycle storage Test	-20°C/30min ↔ +70°C /30min for 30cycles, Transfer time less than 5min	Note2,3
Thermal humidity storage Test	60°C x 90%RH / 240Hours	Note2,3
Package Vibration Test	Frequency: 10Hz~55Hz, Amplitude: 1.5mm, 1 hrs for each direction of X, Y, Z	Note2
Packing shock test	Drop to the ground from 60cm height, 1 corner, 3 edges, 6 surfaces.	Note2
ESD(Whole Machine)	Contact: ±8KV, Air: ±12KV 150PF/330Ω, 5Points/panel, 5times	Note4

Inspection after Test:

Note1: Ta is the ambient temperature of samples.

Note 2: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but doesn't guarantee all the cosmetic specification.

Note 3: Before cosmetic and function tests, the product must have enough recovery time, at least 2 hours at room temperature.

Note 4: In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Note5: The final interpretation of the above reliability test standard is owned by VIEWE.

8. PACKAGE DRAWING

