



REV.	CONTENT	DESIGN	DATE
A	FIRST RELEASE	肖喜亮	20200526

正视图

侧视图


背视图

FPC展开出货

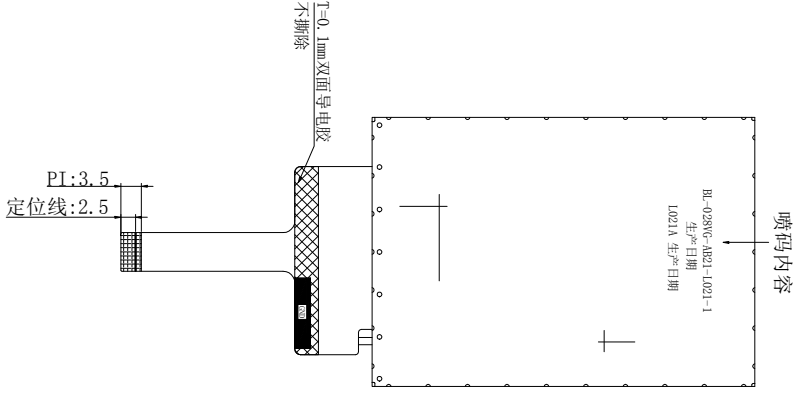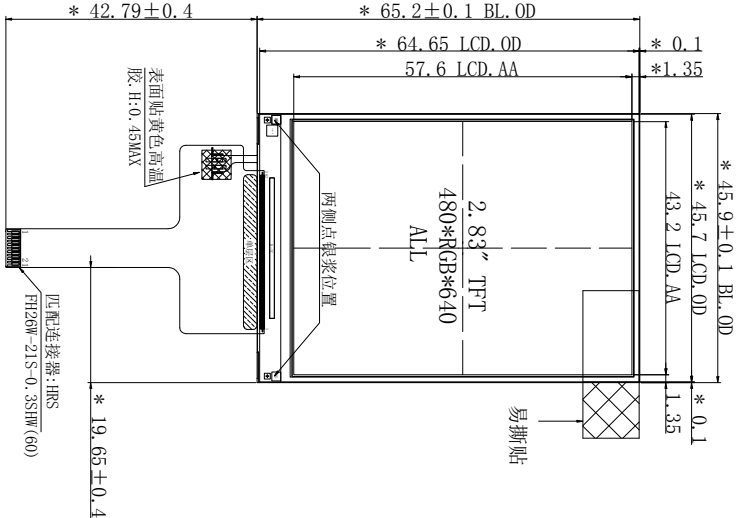

No.	Symbol
1	GND
2	MIP1_D0P
3	MIP1_D0N
4	GND
5	MIP1_CP
6	MIP1_CN
7	GND
8	MIP1_D1P
9	MIP1_D1N
10	GND
11	GND
12	LCM_RST
13	GND
14	V1028_PMU
15	V1018_PMU
16	GND
17	LED_A
18	LED_K
19	GND
20	GND
21	GND

- NOTES:
1. DISPLAY TYPE: 2.83" 480*640 TFT LCD
 2. TRANSMISSIVE NORMALLY BLACK
 3. Driver IC: ST7701S
 4. OPERATING TEMPERATURE: -20° C TO 70° C;
 5. BL LED: 6 CHIP-WHITE LEDs, If=40mA, Vf=1.8V (TYP)
 6. LCM Luminance: 840cd/m² MIN, 900cd/m² TYP;
 7. White Chromaticity: X:0.3±0.04, Y:0.34±0.04;
 8. Unspecified TOLERANCE: ±0.2mm;
 9. RoHS2.0 Compliant;
 10. With "*" is the focus of inspection dimension



CUSTOMER APPROVE			
		深圳市优奕视界有限公司 SHENZHEN VIEWO TECHNOLOGY CO., LTD	
MODULE NO.	LCM-UE028VG-AB21-L021A	DRAWN	肖喜亮
TITLE	LCM	CHECKED	陈冈
SCALE 1:1	第三视角	APPROVE	钟祥林
		UNIT MM	PAGE 1/1