

LCD MODULE
SPECIFICATION

Model:	UE050HD-RB30-A066C
Version:	V1.1
Date:	20200325

- ☒ **Preliminary Specification** 样品规格书
- ☐ **Final Specification** 量产规格书

Customer Confirmation 客户确认

Approved by	Notes

Please return one of the copies of the specification with your signature to us within two weeks after you receive this document. If it is not returned, we will assume that you agree to the entire contents of this specification document.

请贵司在收到规格书的两周内, 将签好字的规格书原件或者复印件寄回. 如果没有返回, 我司将会认为贵司已经默认接受产品规格书中的全部资料和规范.

VIEWE Confirmation 优奕确认

Prepared by	Reviewed by	Approved by

REVISION HISTORY

Revision 版本号	Date 日期	Contents of Revision Change 修改内容	Remark 备注
V1.0	2020.03.25	Preliminary release	
V1.0	2020.03.26	Add the panel model	

TABLE of CONTENTS

1. GENERAL INFORMATION.....	4
1.1 Features.....	4
1.2 Mechanical Specification.....	4
2. ABSOLUTE MAXIMUM RATINGS.....	5
3. MECHANICAL DRAWING.....	6
4. I/O CONNECTION & BLOCK DIAGRAM.....	7
4.1 I/O Connection.....	7
4.2 Block Diagram.....	8
5. ELECTRICAL CHARACTERISTICS.....	9
5.1 TFT-LCD Panel Driving Section.....	9
5.2 Back Light Driving Section.....	9
5.3 Power On/Off Sequence.....	10
5.4 Timing Characteristics.....	12
5.5 Timing Diagram.....	12
6. OPTICAL CHARACTERISTICS.....	12-14
7. RELIABILITY.....	16
8. PACKAGE DRAWING.....	17

1. GENERAL INFORMATION

1.1 Features

- 1) Pixel Arrangement: RGB Vertical Stripe
- 2) Interface Mode: MIPI
- 3) Driver IC: ILI9881D-01T00GA
- 4) Operation Temperature: -20~70℃
- 5) Storage Temperature: -30~80℃
- 6) Backlight Type: White LED
- 7) Display mode: Normally Black,
- 8) Pixel Density: 293PPI
- 9) LED life time: 30,000 Hours

1.2 Mechanical Specification

Item 项目	Specification 规格	Unit 单位	Remark 备注
Pixel Driving element	IPS TFT	-	-
Screen Size	5.0	Inch	Diagonal
Resolution	720(W)*3(RGB)*1280(H)	Dots	-
Interface	MIPI	-	4lane
Module Power Consumption	0.859	Watt	Typ.
VActive VArea	62.7(W)*111(H)	mm	-
Pixel pitch (W*H)	0.02875(W)*0.08625(H)	mm	-
Module Size (W*H*D)	69.30(W)*133.84(H)*2.61(D)	mm	-
Luminance	350	cd/m ²	Typ.
Viewing Direction	All	O'clock	-
Display Color	16.7M	Colors	24bits

2. ABSOLUTE MAXIMUM RATINGS

Item 项目	Symbol 符号	Min. 最小值	Max. 最大值	Unit 单位	Remark 备注
Power supply1 voltage	IOVCC	-0.3	3.6	V	Note1
Power supply2 voltage	VDD	-0.3	3.6	V	Note1
Power supply3 voltage	TP_VDD	-0.3	3.6	V	Note1
LED forward current	I _F	-0.001	30	mA	For each led, Note1
LED Reverse Voltage	V _R	-	5	V	For each led, Note1
Operating temperature	T _{op}	-20	70	°C	Note1,2
Storage temperature	T _{st}	-30	80	°C	Note1,2
Humidity	H _{st}	10	90	%RH	Note1,3

(Ta=+25°C, GND=0V)


Note1: If the module exceeds the absolute maximum ratings, it may be damaged permanently. Also if the module operates with the absolute maximum ratings for a long time, the reliability may drop.

Note2: In case of temperature below 0°C, the response time of liquid crystal (LC) becomes slower and the color of panel darker than normal one.

Note3: Temp. ≤ 60°C , 90% RH MAX.

Temp. > 60°C , Absolute humidity shall be less than 90% RH .

3. MECHANICAL DRAWING

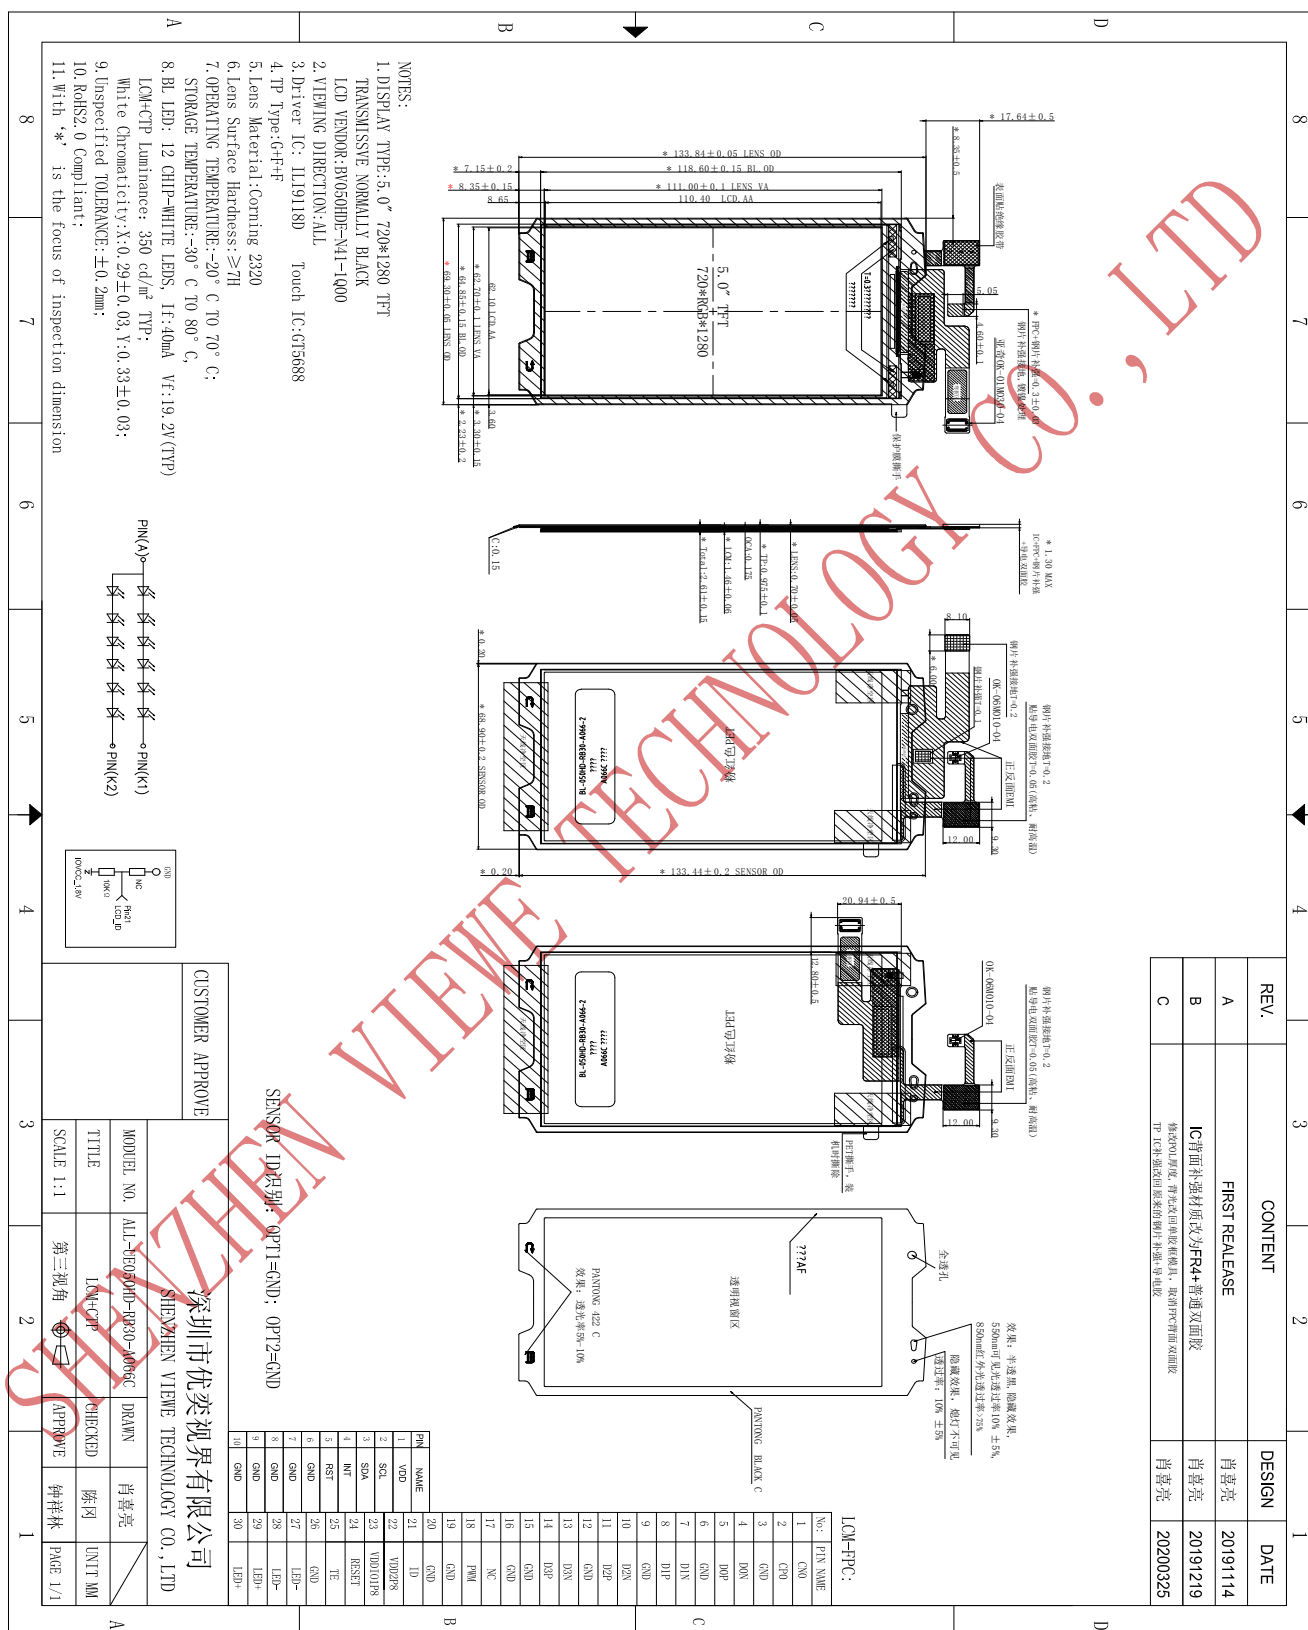

4. I/O CONNECTION & BLOCK DIAGRAM


4.1 I/O Connection

Pin No. 序号	Symbol 符号	I/O	Description 描述
1	CLKN0	I	MIPI-DSI clock lane positive-end input pin
2	CLKP0	I	MIPI-DSI clock lane positive-end input pin
3	GND	P	Ground
4	D0N	I	MIPI-DSI data lane 0 negative-end input pin
5	D0P	I	MIPI-DSI data lane 0 positive-end input pin
6	GND	P	Ground
7	D1N	I	MIPI-DSI data lane 1 negative-end input pin
8	D1P	I	MIPI-DSI data lane 0 positive-end input pin
9	GND	P	Ground
10	D2N	I	MIPI-DSI data lane 2 negative-end input pin
11	D2P	I	MIPI-DSI data lane 2 positive-end input pin
12	GND	P	Ground
13	D3N	I	MIPI-DSI data lane 3 negative-end input pin
14	D3P	I	MIPI-DSI data lane 3 positive-end input pin
15-16	GND	P	Ground
17	NC	-	NC
18	PWM	I	LED BLU Brightness Control(Note 1,2)
19-20	GND	P	Ground
21	ID	O	ID Select.
22	VDD	P	Power supply for digital circuits (3.3V)
23	IOVCC	P	Power supply for digital circuits and IO pads(1.8V)
24	RESET	I	Chip reset signal
25	TE	I	Tearing effect output pin to synchronize MCU to frame writing
26	GND	P	Ground
27-28	LED_K	P	Power supply for LED-
29-30	LED_A	P	Power supply for LED+

I: Input; O: Output; P: Power

TP PIN .	Symbol	I/O	Description
1	TP_VDD	P	TP_VDD(2.8V) Power Supply for TP
2	TP_SCL	I	I2C clock signals for TP
3	TP_SDA	I/O	I2C data signals for TP
4	TP_INT	O	Interrupt signals for TP
5	TP_RST	I	The signal will reset the TP, Signal is active low
6-10	GND	P	Ground.

4.2 Block Diagram

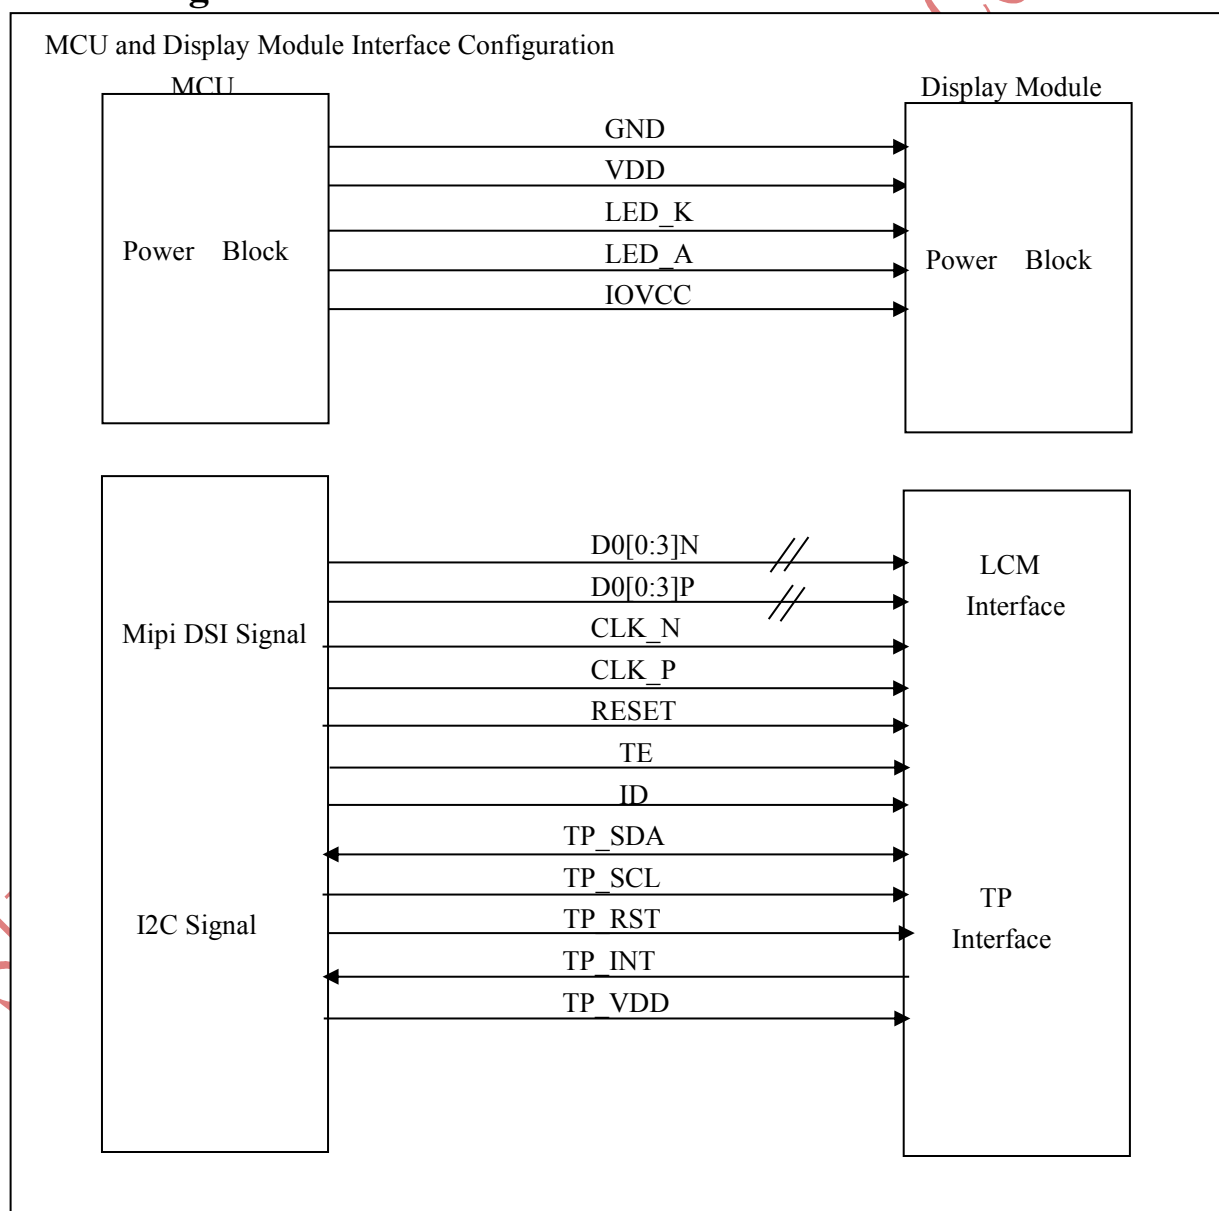

5. ELECTRICAL CHARACTERISTICS

5.1 TFT-LCD Panel Driving Section

Item 项目	Symbol 符号	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Power Supply1 Voltage	IOVCC	1.7	1.8	3.6	V	-
Power Supply2 Voltage	VDD	2.8	3.3	3.6	V	-
Power Supply3 Voltage	TP_VDD	2.8	3.3	3.6	V	-
Power Supply Current	IIOVCC	-	30	-	mA	Note1
Logic Input High Voltage	V _{IH}	0.7IOVCC	-	IOVCC	V	-
Logic Input Low Voltage	V _{IL}	0	-	0.3IOVCC	V	-
Panel Power Consumption	P _{fog}	-	0.091	-	Watt	Note1
Module Power Consumption	P _{LCM}	-	0.859	-	Watt	Note1,2

Note1: Measurement Conditions (Video Mode): Full Screen Red Pattern, IOVCC=1.8V, 60Hz Refresh.

Note2: $P_{LCM} = P_{IOVCC} + P_{BL}$, About P_{BL} information, inference to 5.2 Back Light Driving Section.


5.2 Back Light Driving Section

Item 项目	Symbol 符号	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Forward Voltage	V _F	-	19.2	-	V	Note1
Forward Current	I _F	-	40	-	mA	Note1
Backlight Power consumption	P _{BL}	-	0.768	-	Watt	Note1
LED life time	-	30000	-	-	Hours	Note2
LED Quantity		12			PCS	


Note1: The LED driving condition is defined for each LED module (6 LED Serial, 2 LED Parallel).

For each LED : $I_F = 20\text{mA}$, $V_F = 3.2\text{V}$ (Typ.), $T_a = 25^\circ\text{C}$.

Note2: The "LED life time" is defined as the module brightness decrease to 50% of original brightness at $I_{LED} = 20\text{mA}$ (Per Led). The LED life time could be decreased if operating I_{LED} is larger than 20mA.

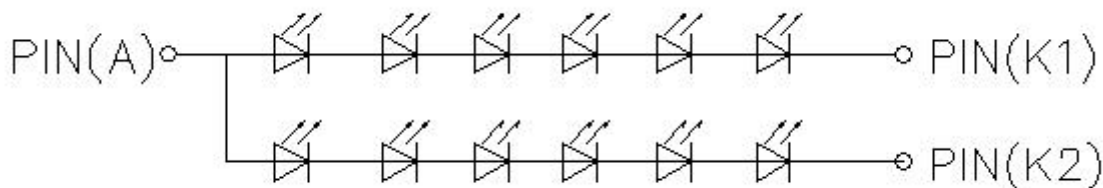

5.3 Power On/Off Sequence

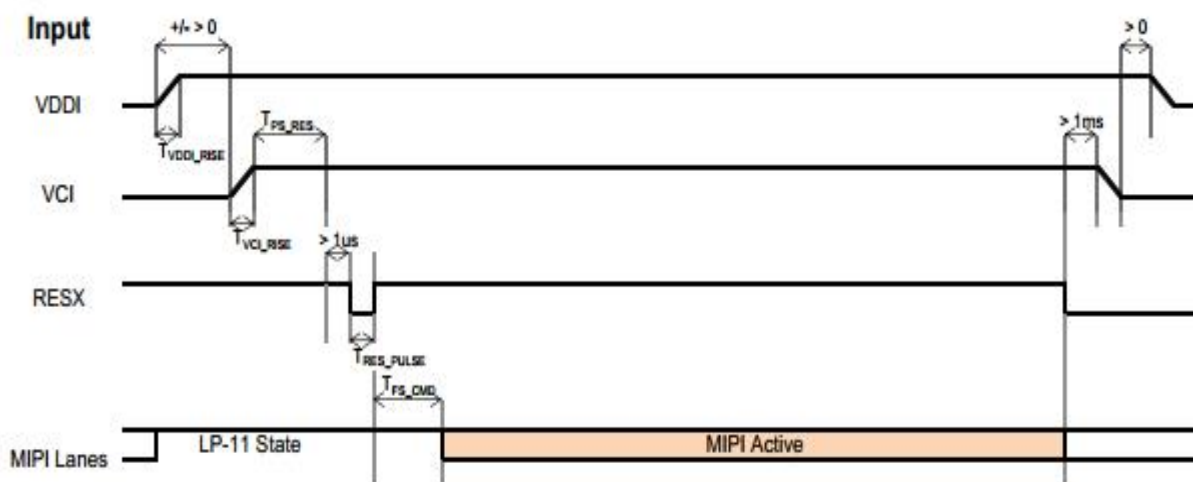


Symbol	Characteristics	Min.	Typ.	Max.	Units
T_{VDDI_RISE}	VDDI Rise time	100	-	-	us
T_{VCI_RISE}	VCI Rise time	130	-	-	us
T_{PS_RES}	VDDI/VCI on to Reset high	5	-	-	ms
T_{RES_PULSE}	Reset low pulse time	10	-	-	us
T_{FS_CMD}	Reset to first command	10	-	-	ms

Uncontrolled Power Off

The uncontrolled power off means a situation when a battery is removed without the controlled power off sequence. There will not be any damages for the display module, or the display module will not cause any damages for the host or lines of the interface. At an uncontrolled power off event, the ILI9881D will force the display to become blank and will not have any abnormal visible effects within 1 second on the display and remains blank until the Power On Sequence powers it up.

5.4 Timing Characteristics

5.4.0 I2C interface timings

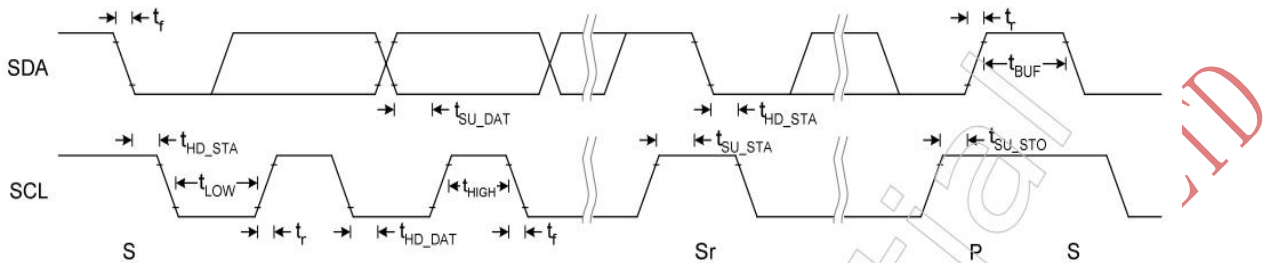

Parameter	Symbol	Min.	Max.	Unit
SCL low period	t_{lo}	1.3	-	us
SCL high period	t_{hi}	0.6	-	us
SCL setup time for START condition	t_{st1}	0.6	-	us
SCL setup time for STOP condition	t_{st3}	0.6	-	us
SCL hold time for START condition	t_{hd1}	0.6	-	us
SDA setup time	t_{st2}	0.1	-	us
SDA hold time	t_{hd2}	0	-	us

Note: 3.3V 通讯接口，400Kbps 通讯速度，上拉电阻 2K

5.4.1 AC Characteristics

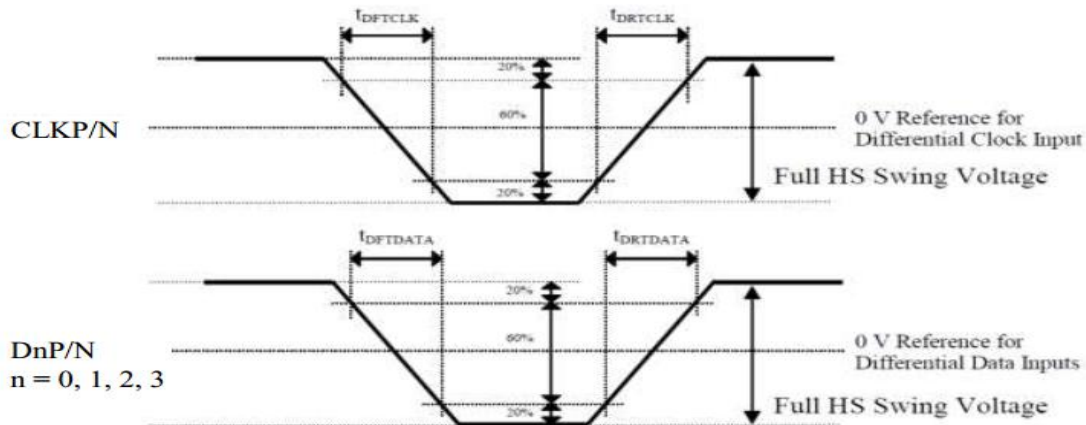



Figure 115: Rising and Falling Timings on Clock and Data Channels

Table 41: Rise and Fall Timings on Clock and Data Channels

Parameter	Symbol	Condition	Specification		
			Min	Typ	Max
Differential Rise Time for Clock	t_{DRTCLK}	CLKP/N	150 ps	-	0.3UI (Note)
Differential Rise Time for Data	$t_{DRTDATA}$	DnP/N $n=0,1,2,3$	150 ps	-	0.3UI (Note)
Differential Fall Time for Clock	t_{DFTCLK}	CLKP/N	150 ps	-	0.3UI (Note)
Differential Fall Time for Data	$t_{DFTDATA}$	DnP/N $n=0,1,2,3$	150 ps	-	0.3UI (Note)

5.5 Timing Diagram

5.5.1 Horizontal and Vertical Timings

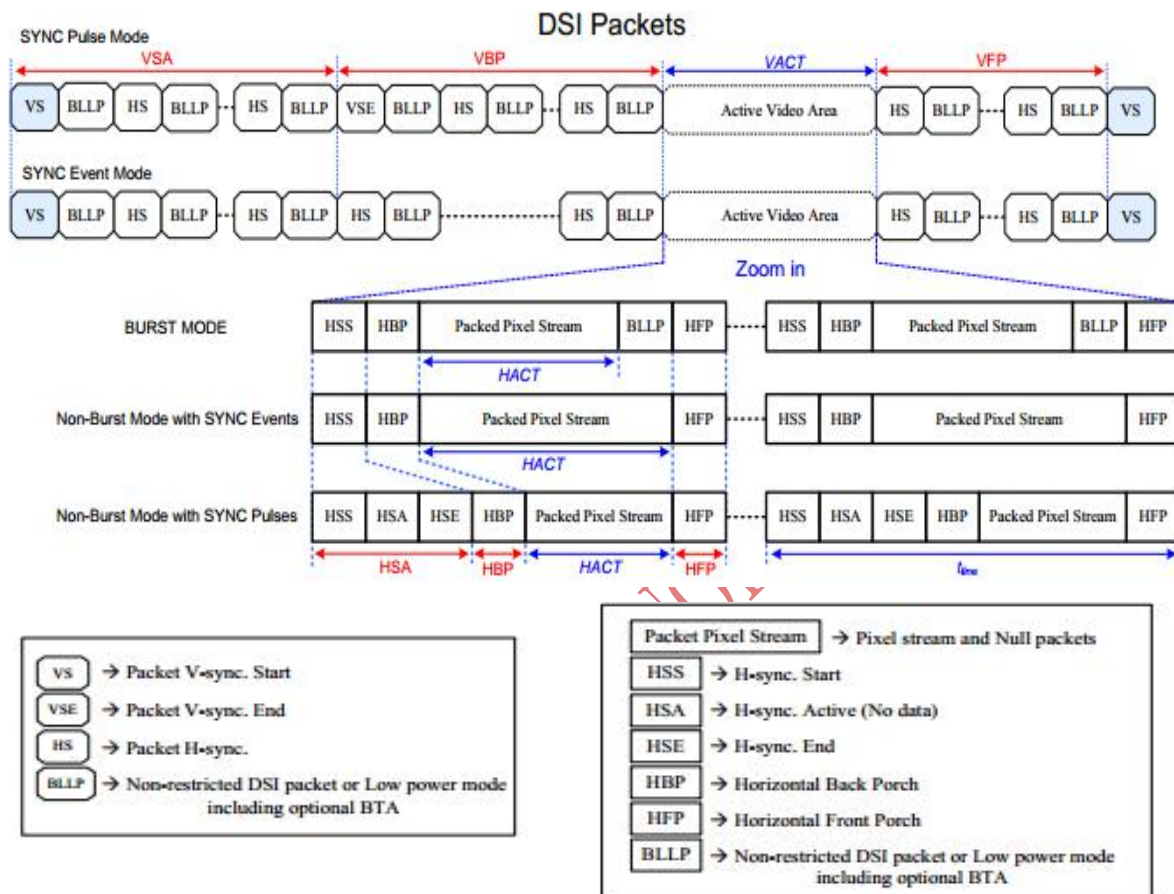

5.5.3 Timing Parameters

Parameter	Symbol	Value			Unit
		Min.	Typ.	MAX.	
Bit rate per lane	BRPHY	80	-	1000	Mbps
Active pixel per line	HACT	-	720	-	Pixels
Horizontal back porch	tHBP	-	20	-	DCLK
Horizontal sync active	tHSA	-	20	-	DCLK
Horizontal front porch	tHFP	-	100	-	DCLK
Active pixel per frame	VACT	-	1280	-	H
Vertical back porch	tVBP	-	15	-	H
Vertical sync active	tVSA	-	2	-	H
Vertical front porch	tVFP	-	15	-	H


6. OPTICAL CHARACTERISTICS

Parameter 参数	Symbol 符号	Condition 条件	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位	Remark 备注
Contrast Ratio	C/R	$\theta = 0^\circ$	600	900	-	-	Note(4)
NTSC Ratio	S	$\theta = 0^\circ$	64	68	-	%	Note(7)
Luminance	L	$\theta = 0^\circ$	-	350	-	cd/m ²	Note(5)
Luminance uniformity	U _W	$\theta = 0^\circ$	-	80	-	%	Note(3)
Response Time	T _R + T _F	25 °C	-	30	35	ms	Note(2)
Color Coordination	W _X	$\theta = 0^\circ$ (Center) Normal viewing angle B/L On	-0.03	0.290	+0.03	NTSC (x,y)	Note(6)
	W _Y			0.330			
	R _X			0.661			
	R _Y			0.323			
	G _X			0.274			
	G _Y			0.583			
	B _X			0.134			
	B _Y			0.124			
Viewing Angle	θ_L	C/R>10	-	85	-	Degree	Note(1)
	θ_R		-	85	-		
	θ_U		-	85	-		
	θ_D		-	85	-		


Test Conditions:

1. IOVCC=1.8V, I_F=40mA (Backlight current), the ambient temperature is +25°C.
2. The test systems refer to Note 8.

Note1: Definition of Viewing Angle: The viewing angle range that the CR>10

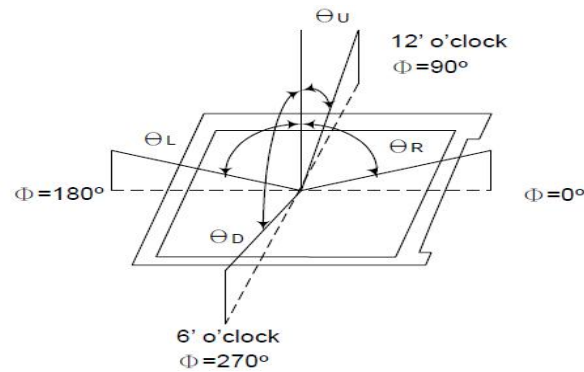


Note2: Definition of Response time: Sum of T_R and T_F

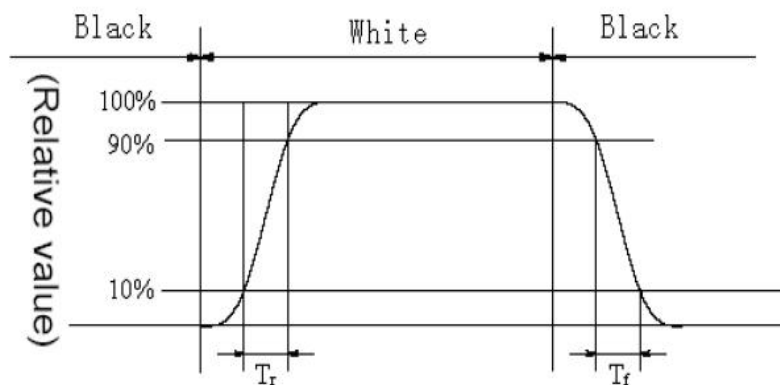

Note 3: Definition of Luminance Uniformity: Active area is divided into 9 measuring areas, every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity} = \frac{\text{Min Luminance of white among 9-points}}{\text{Max Luminance of white among 9-points}} \times 100\%$$

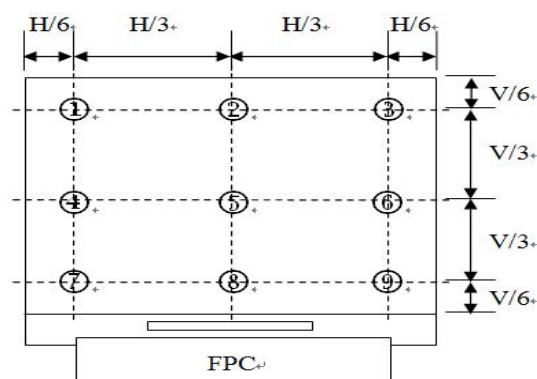

Note4: Definition of Contrast Ratio (CR): measured at the center point of panel

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$


Note 5: Definition of Luminance: Center Luminance of white is defined as luminance values of 1 point average across the LCD surface.

Note 6: Definition of Color Chromaticity (CIE 1931)

Color coordinates of white & red, green, blue measured at center point of LCD.


Note 7: Definition of NTSC ratio:

$$\text{NTSC ratio} = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}}$$

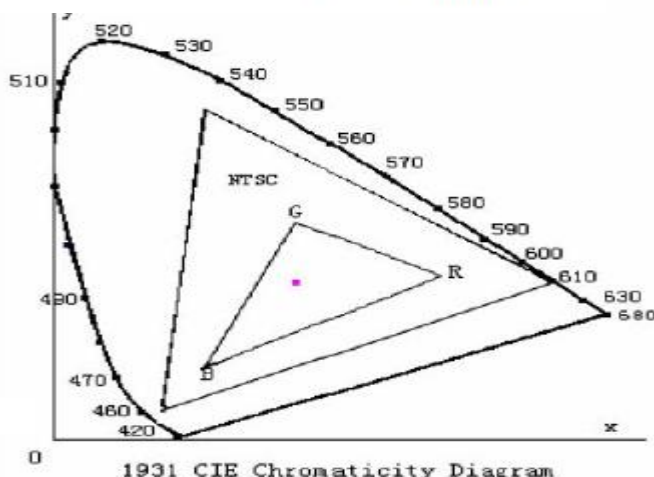

Note 8: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, Field of view: 1°/Height: 500mm.)

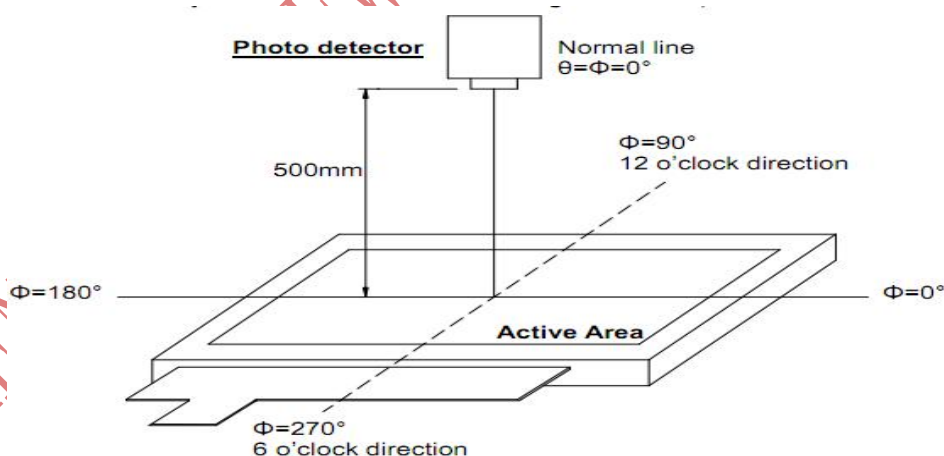

7. RELIABILITY

Item 项目	Test Condition 测试条件	Remark 备注
High Temperature Storage	Ta =+80°C / 96Hours	Note1,2,3
Low Temperature Storage	Ta =-30°C / 96Hours	Note1,2,3
High Temperature Operating	Ta =+70°C / 96Hours	Note1,2,3
Low Temperature Operating	Ta =-20°C / 96Hours	Note1,2,3
Temperature Cycle storage Test	-30°C/30min ↔+80°C /30min for 30cycles, Transfer time less than 5min	Note2,3
Thermal humidity storage Test	60°C x 90%RH / 96Hours	Note2,3
Package Vibration Test	Frequency: 10Hz~55Hz, Amplitude: 1.5mm, 1 hrs for each direction of X, Y, Z	Note2

Inspection after Test:

Note1: Ta is the ambient temperature of samples.

Note 2: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but doesn't guarantee all the cosmetic specification.

Note 3: Before cosmetic and function tests, the product must have enough recovery time, at least 2 hours at room temperature.

8. PACKAGE DRAWING

